


8M IR Bullet Camera

SCL-182VM



- 8.51Mega SONY Exmor-R™ CMOS Sensor
- 4K High Resolution
- Lens : 2.7-13.5mm MFZ Lens(F=1.6-3.3±10%)
- 6pcs Super IR LED
- WDR / D-WDR
- DNR(Digital Noise Reduction, 2D+3D)
- Sens-Up x32
- Privacy Mask

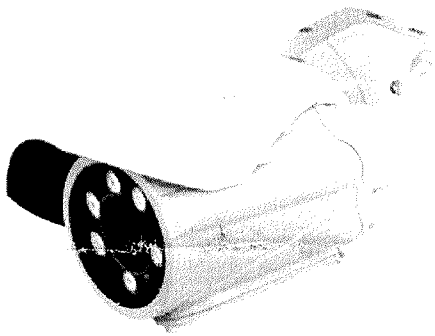

SPECIFICATIONS

Image Sensor	1/2.5" 8.51M Exmor-R™ CMOS Sensor
Total Number of Pixels	3884(H) x 2218(V)
Resolution	UHD, 4K
Frame	15fps 4K UHD
Min. Illumination	Color : 0.30 Lux(50IRE) / 0.15 Lux(15IRE) B/W : 0.15 Lux(50IRE) / 0.07Lux(15IRE)
S/N Ratio	More than 50dB (AGC off)
Video Output	EX-SDI : 8M@15fps, 4M/2M@30fps/25fps AHD/TVI : 8M@15fps/13.5fps, 5M@20fps/13.5fps, 4M/2M@30fps/25fps CVBS : 960H
Lens	2.7-13.5mm Motorized Auto Focus/Zoom
IR LED	6pcs Super IR LED
Infrared Distance	40 m
Day & Night	ICR(Infrared Cut filter Removal) system
WDR	Line mode(15fps)/Frame mode(7.5fps)
D-WDR	ON/OFF
BLC	ON/OFF (size, position)
HLC	Level Setting (0-10)
AGC	Level Setting (0-10) : Max. 72dB(TBD)
Camera Title	ON/OFF (Letters A-Z, Number 0-9, Symbols)
White Balance	AUTO / AUTOext / PUSH / MANUAL
DNR	2D+3D, OFF/LOW/MIDDLE/HIGH
Motion Detection	ON/OFF
Privacy Mask	BOX (16 areas), Polygon (8 areas), ON/OFF (Color, Position)
Sens-Up	x2 / x4 / x8 / x16 /x32
Defog	AUTO / MANUAL
Outdoor Ready	IP67
Operation Temperature	-10°C ~ +50°C
Operation Humidity	0% ~ 95%
Power Source	DC 12V
Power Consumption	Max 10.0W
Dimension	223mm x 109mm x 142mm

Dimension



* Design and specifications are subject to change without notice