

2. Recording setting



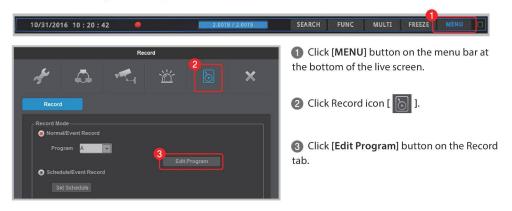

- Select FPS and Quality for Normal Record and Event Record from Program page.
- tip The higher FPS (frame rate per second) and Quality provides higher-definition recording image.
- tip Generally, Normal Record is recording for motionless image and Event Record is recording for image with motion.
- tip For efficient use of HDD, user can maximize the recording period by only using Event Record.
- * Recommended setting
- Normal Record: FPS (1) Quality (Q7)
- Event Record: FPS(15) Quality (Q7)
- User can check the record capacity usage and minimum recording time based on the setting value.
- Click [Apply to All Channels] button if you want to set all channels with same setting value.

3. Copy



- ▲ Connect storage device in advance.
- Click [COPY] from mouse right-click menu on live view page.
- Select the format (AVI, EXE) of video to copy.
- Select the channel to copy.
- Select start and end time to copy.
- 6 Check the estimate file size by clicking [Estimate File Size] button.
- tip If the storage space is not enough, format the storage device by clicking [Format] button.
- 6 Click [Start] button after finish all settings.
- Do not remove the storage device until backup complete message pops up.

tip Video format types

Format	Storage Device	Copy channel	Player
AVI	USB memory or external hard drive	single channel	general Media Player
EXE		multi-channel	Mini Player, Control Center Playback

4. Check system information



Click [Information] – [System] from mouse right-click menu on live view page.

YSTEM INFORMATION		
Model Name	HS1620F-PI	
Firmware Version	8.2.16(2.0.3	
Hardware Version		
U-Boot Version	2.0.6	
Serial Number	X90116202470	
MAC Address		
Camera Type	30Hz(60Hz	
HDD Total Space	105.02T	
HDD Free Space	0 TB(OVERWRITING	

- 2 DVR's system information will pop up.
- tip User also can check screen and video information in the same menu.

1. Search & Playback



O Playback



- ① **Bookmark**: Clicking bookmark moves to specific time that user set
- 🤰 💶 🔼 Fast reverse playback : 1, 2, 4, 8, 16, 32, 64 times reverse playback (If click this button at pause, it moves 1 frame reversely)
- 3 Reverse playback : 1x reverse playback
- 4 Pause
- 5 Normal playback : 1x playback
- (if click this button at pause, it moves 1 frame forward)
- Slow playback: 1/2x playback
- 8 E Event playback: It only playback motion(Event) recording file.

① Click [SEARCH] button on the menu tool bar at the bottom of live view page.

2 Calendar search

Select a date from calendar and it moves to the date.

tip It marks the dates which have recording data.

3 Event search

Event information of the date will be displayed on log viewer.

4 Time search

It moves to specific time if user enter a date and time and click enter button.

6 Timeline search

Event history will be displayed on the timeline bar. If user clicks a position on the timeline, DVR's playback time moves to that point.

tip User can choose the time interval among 10 min, 1 hour, 6 hours, 1 day from [Interval] option.

tip Different timeline color will be displayed based on recording or event information.



Copy

User can copy the video file by clicking [COPY] button. (Refer to "3. Copy")